

SUPERACE® WASHER SEL-1325V-2

Hot Water and Steam Cleaning

**Diesel Engine and
Soundproof Diesel Fuel
Safety Devices installed**

Extra 37L capacity fuel
tank big enough for both
boiler and engine



**High Efficiency
Heatcoil Boiler**

56,000 kcal Boiler installed
for both hot water and steam


Control Panel



- 1 Temperature adjustment dial
- 2 Boiler Switch
- 3 Main Starting Key
- 4 Maintenance lamp



Self Priming from water tank, can be operated
away from public water supply

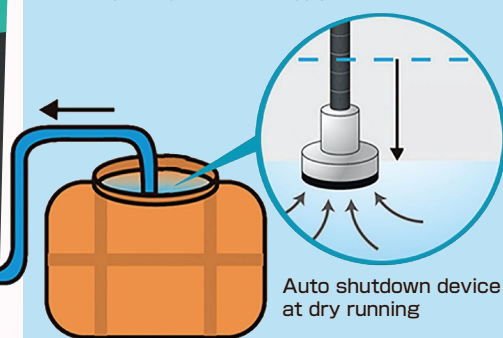

**Large opening
Maintenance Panel**
Easy Access
at Maintenance

No electric power supply required



Specification

Product Name	SEL-1325V-2
Max Pressure(kgf/cm ²)	24.5(250)
Flow Rate (L/min)	13.3
RPM	1220
Type	Water-cooled 4-cycle diesel engine
Total displacement (cc)	479
Power Rating	7.4kW(10.0PS)/2800min ⁻¹
Max Power Rating	9.3kW(12.7PS)/3600min ⁻¹
Starting Method	Cell Starter
Fuel Type	JIS No.2 light fuel (Diesel)
Tank size (L)	37
Temperature	30°C~150°C
Power Rating (kcal/h)	56000
Dimensions (LxWxH)(mm)	1227x689x924
Weight(kg)	300.0

Equipment	Trigger gun + Spray Lance 1050mm
	Wide angle nozzle
	High Pressure Hose 20m w/ coupling
	Suction Hose 3m
	Strainer Filter
	Bypass Water Hose 3m
	Face Shield
	Nitrile Gloves



High Pressure Power washer

**SUPERACE®
WASHER**

SUPER INDUSTRIES CO.,LTD

<http://www.super-ace.co.jp/english/>